



Gpstracker.net.in

Freedom is lost now...!



Mv1b1 User Manual

Thank you for purchasing the tracker. This manual shows how to operate the device smoothly and correctly. Make sure to read this manual carefully before using this product. Please note that specification and information are subject to changes without prior notice in this manual. Any change will be integrated in the latest release.

1. Summary functions

Working Based on existing GSM/GPRS network and GPS satellites, this product can locate and monitor any remote targets by SMS or GPRS.

1. Main functions

- GSM quad-band frequency for globe use;
- Real time tracking location by SMS/GPRS;
- Real time voice monitoring function ;
- Recover original password;
- Set authorized number;
- Reboot device ;
- Overspeed alarm alarm ;
- ACC anti-theft alarm ;



Gpstracker.net.in

Freedom is lost now...!

3. Specs.

Content	Specs.
Dim.	8 cm x 4.2 cm x 1 cm
Weight	50g
Network	GSM/GPRS/GPS
Band	900/1800Mhz or 850/900/1800/1900 Mhz
GPS chip	Siemens
GSM module	Sim com gprs class10
GPS sensitivity	-179dBm
GPS accuracy	5m
Time To First Fix	Cold status 45s Warm status 35s Hot status 1s
Work voltage	9V-36V
Storage Temp.	-40°C to +85°C
Operation Temp.	-20°C to +55°C
Humidity	5%--95%

4. Installation instructions

4.1 Preparation

4.1.1 Open the package to check the device model number is correct, be with full accessories, or else please contact your supplier;

4.1.2 Choose SIM card, need insert a GSM SIM card into the device, please refer to the suggestion of your supplier for SIM card choice.

Notice:

Please turn the device power switch to on before install SIM card;

The SIM card need open the GPRS function;

Please make sure SIM card with full balance.

4.2 Installation

The device is hidden type installation, we suggest the device installing by professional institution. Please pay attention to the following points:

4.2.1 To avoid the thieves destruction, the device installation place should be as far as hidden.

4.2.2 Avoid putting the device with reversing radar, car burglar alarm and any other vehicle communication devices;




Gpstracker.net.in

Freedom is lost now...!

4.2.3 Can fix the device by ribbon or wide sponge powerful two-side glue stick;

4.2.4 The device has built-in GSM and GPS antenna, make sure the receive side upward and there is no metal shielding.

4.2.5 Recommended installation place: ①The hidden place in the board below the front windscreen; ②The hidden place around former dashboard (nonmetal material for skin); ③The hidden place in the board below the back windscreen.

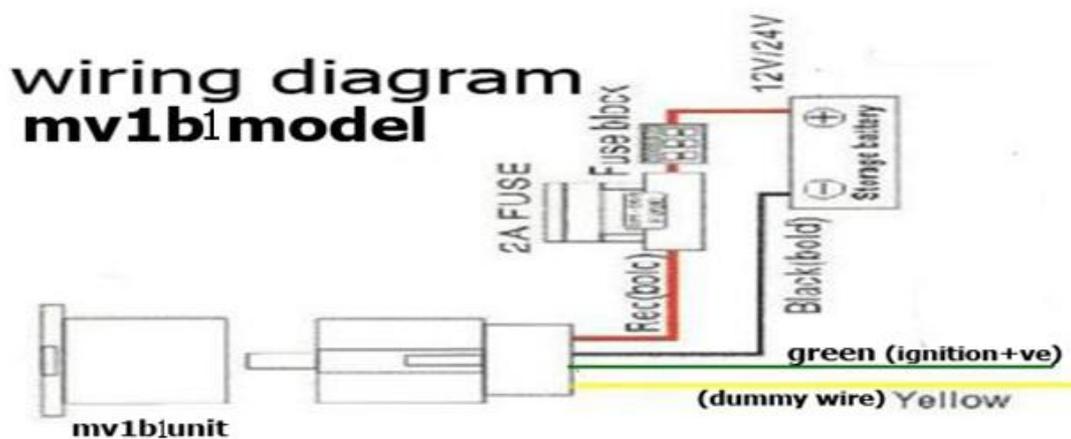

Notice:

If the windscreen glued by metal thermal insulation layer or heating layer, it will reduce the GPS receive signal and lead to GPS work disorder, then please change the installation place.

5. Wires connection

1. Red wire connects to vehicle power anode
2. Black wire connects to vehicle power cathode
3. Yellow wire connects to oil or circuit control wires
4. Green wire connects to ACC wire

Note: Device must connect to ACC wire

6. Device Parameter Settings

6.1 Initialization

Send SMS “#begin#” to the tracker, it will reply “begin ok” and initialize all the settings. (Default password: 123456). Remark: initialization is resetting all the parameters to factory defaults.

For example, send SMS “#begin#”, If succeeded, it will reply “begin ok”.



Gpstracker.net.in

Freedom is lost now...!

6.2 Set password

6.2.1 Set Password: Send SMS: “#password#old password#new password#” to the unit to change the password.

For Example, send SMS: “#password#123456#666888#” to device, it will reply SMS: “password OK”.

6.2.2 Make sure the new password is in 6 digits arabic numbers, or the device cannot recognize the password.

6.2.3 Resume original password: send SMS: “#resume#” to the device, it will reply SMS: “resume password, password is 123456”.

6.3 Authorization

6.3.1 Set authorization: send SMS “#admin#password#cell phone number#” to set up authorized number, device will reply “admin ok”.

6.3.3 Delete authorization send SMS “#noadmin#password#authorized number#” to delete the authorized number, device will reply “no admin ok”.

6.4 Single Locating

6.4.1 If there is no authorized number, any number dials up the device number, it will report tracking message; If already set authorized number, then it will not respond when an unauthorized number calls it.

6.4.2 **Dialing tracking:** make a call to device number, it will hang up and reply a real-time tracking message.

6.4.3 **SMS tracking:** send SMS “#smslink#123456#”, it will reply a real-time tracking message.

*Tracking location, when GPS signals is weak, you will receive the last location when GPS is available. If it is different with its exact current location, pay attention to check the time included in the SMS.

6.5 Get geographical location

6.5.1 Must set the SIM Card APN parameter firstly before using this function, if there is APN user name and password, Please refer to point 6.13 to set.

6.5.2 Send SMS: “DW” to device, it will reply current location info. For example: 13-100, meerpet, Hyderabad

Note: this function may not work in some certain area.



Gpstracker.net.in

Freedom is lost now...!

6.6 Auto continuous track

6.6.1 Limited times auto track: Send SMS “#at#30#sum#15#” to the device, it will reply the tracking message at 30s intervals for 15 times. (default “s”:second).

6.6.2 Unlimited time auto track: Send SMS “#at#30#sum#0#” to the device. Remark: device must be connected to tracking software.

6.6.3 Cancellation: Send SMS “#noat#password#” to the device.

6.7 Voice Surveillance

6.7.1 The command to switch between Track and Monitor are “tracker” and “monitor

6.7.2. The default mode is “track” (Tracking status).

6.7.3. Send SMS “#monitor#password#” to the device, and it will reply “monitor ok!” and switch to “monitor” mode. Then use mobile phone to dial the device number, it will get though and enter voice listening function.

6.7.4. Send SMS “#tracker#password#” to the device, it will reply “tracker ok!” and restore to “track” mode.

6.9 Overspeed alarm

6.9.1 Set up: Send SMS: “#speed#password#speed number in 3 digits#” to the device (suppose the speed is 80km/h), EG, send SMS “#speed#123456#080#”, and it will reply “speed ok ”. When the car moves exceeding 80 km/h, the unit will send SMS alert “speed alarm” to the authorized number.

6.9.2 Cancel: send SMS “#nospeed#password#” to deactivate the overspeed alarm. it will reply “cancel speed ok”.

6.10 ACC ON alarm

6.10.1 Send SMS “#ACC#ON#” to device to start illegal start alarm function, when vehicle ignition on, device will reply "ACC!!" to the authorized number.

6.10.2 Send SMS “#ACC#OFF#” to device to close the function.

6.11 Time Zone Setting

Remark: UTC+5.30 is default time zone.

6.11.1 Send SMS “#timezone#password#direction#time zone value in hours#time zone in munites#”. If set OK, it will reply “time zone ok”. If in UTC+5.30, send SMS “#timezone#123456#E#5#30#”.

6.12 GPRS setting

User must send SMS via cell phone to set IP, port and APN before starting GPRS.

6.12.1 Setting APN

6.12.1.1 APN standards for Access Point Name and differs from country to country. For more



gpstracker.net.in

Freedom is lost now...!

information about the local APN, inquiry from your local GPRS network operator.

6.12.1.2 Send SMS “#apn#password#APN content#APN user name#APN password#” via a cell phone and if succeeded, the tracker will return the message “set APN OK”.

E.g. send SMS command “#apn#123456#airtelgprs#”.

Notes: airtelgprs is the APN content of airtel Mobile (it has no APN user name and password). If there is no APN user name and password, then no need to write APN user name and password.

6.13 IP and Port setting

6.13.1 Send SMS “#IP#password#ip address#port number#”. If succeeded, “set ip address and port ok” will be returned by SMS. Note: “IP” in SMS must be capital letter.

E.g. Send SMS command “#IP# password #37.59.232.31#10202#” to the device (37.59.232.31 is IP, 10202 is port)

6.16 Power failure alarm (optional)

Built-in backup battery to realize power failure alarm, it will send SMS “cut power alert!” to the authorized number.

6.17 Check device setting parameters

Send SMS “TCP” to device, device will reply SMS “ IP+port+APN+GPRS setting(A: valid,V: invalid).

6.18 Web platform GPS tracking software

Web based platform www.gpstracker.net.in Further details please contact manufacturer.

Note:1. to know **additional features** of server plz click on this link. <http://www.gpstracker.net.in/premiumserversupport.html>

2.for quicksetup **manual** download from below link <http://gpstracker.net.in/download/mv1b1.pdf>

3. download android gps settings application : <http://gpstracker.net.in/download/Gps%20Settings.apk>

4.Download **desktop application** from <http://www.gpstracker.net.in/download/pwebtrack.rar>

5.for other network sim card apn names: <http://www.gpstracker.net.in/download/apnnames.pdf>

6.this device carries 2year warranty from the date of server registration

If you have any more queries regarding installation please can call us on 09700025002 or 040 64559002 or mail us at contactus@gpstracker.net.in website: <http://www.gpstracker.net.in>

Office Address: ingo labs 13-100, meerpet , Hyderabad 500097